




Huaxin Bearing Co., Ltd

Bearing NTN Japan 6204zz 6204DDU 6204llu
6204RS 6205 6208

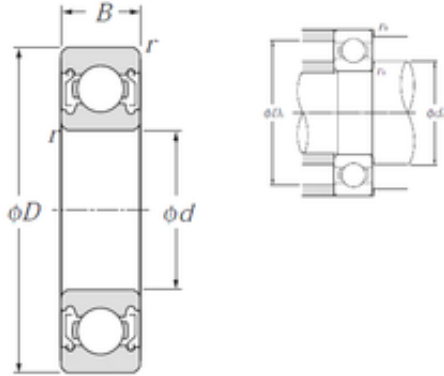

6204zz Bearing 2D drawings and 3D CAD models

Bearing No. 6204zz

Size	20x47x14 mm
Bore Diameter	20 mm
Outer Diameter	47 mm
Width	14 mm
d	20 mm
D	47 mm
B	14 mm
C	14 mm
rn	0,5 mm
r min.	1 mm
da min.	25 mm
da max	28 mm
Da max.	42 mm
ra max.	1 mm
Weight	0,106 Kg
Basic dynamic load rating (C)	12,8 kN
Basic static load rating (C0)	6,65 kN
(Grease) Lubrication Speed	16 000 r/min
Category	Single Row Ball Bearings
Inventory	2.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.103
EAN	4547359004564
Product Group	B00308



Huaxin Bearing Co., Ltd

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	20MM Bore; 47MM Outside Diameter; 14MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6204ZZ/3E
Weight / LBS	0.228
Outer Race Width	0.551 Inch 14 Millimeter
Bore	0.787 Inch 20 Millimeter
Outside Diameter	1.85 Inch 47 Millimeter
bore diameter:	20 mm
precision rating:	ISO Class 0
outside diameter:	47 mm
finish/coating:	Uncoated
overall width:	14 mm
bearing material:	High Carbon Chrome Steel



Huaxin Bearing Co., Ltd

bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	14 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	14 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	16000 rpm
internal clearance:	CN
fillet radius:	1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	18000 RPM
dynamic load capacity:	12800 N
series:	62
static load capacity:	6650 N
manufacturer product page:	Click here